


ThinKom

www.thinkom.com

ThinAir[®] | Ka2517

Ka-band Satcom Antenna for Global Broadband

Delivering High Performance from Every Orbit

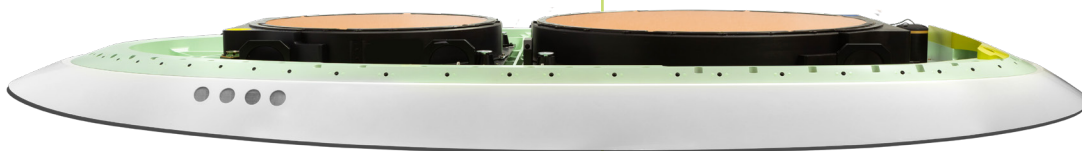


With high beam agility and all-orbit operation, the ThinAir Ka2517 antenna delivers exceptional network flexibility and consistently high performance for global inflight broadband.

Key Features

- Pole-to-pole coverage, including at high and low latitudes
- Seamless operation on GSO and NGSO networks
- Long-term reliability with patented design and minimal active components
- Ultra-low profile, reducing drag and associated fuel costs
- Gate-to-gate operation with low prime power demands
- High throughput: Up to 800 Mbps down and 200 Mbps up
- High spectral efficiency (up to 4 bits/Hz)

TECHNICAL SPECIFICATIONS

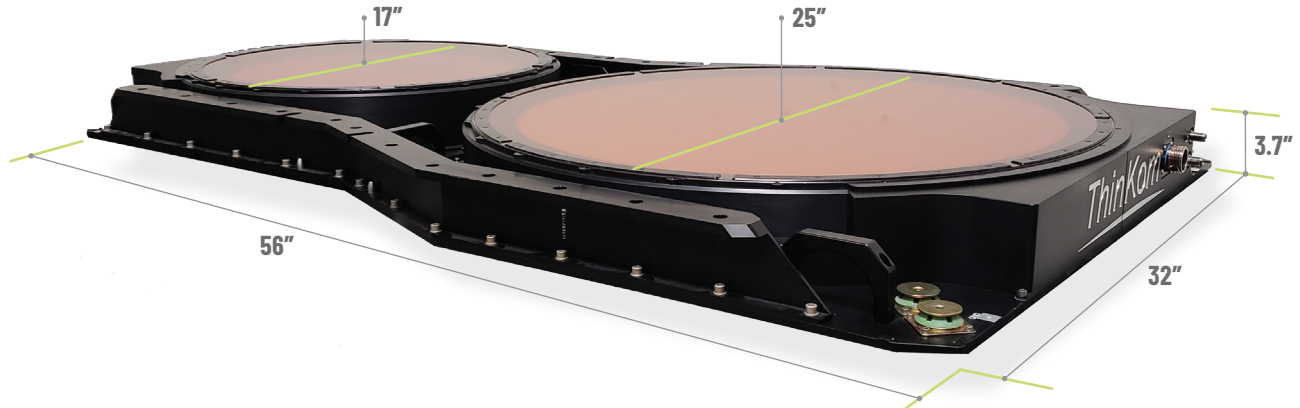

Compatibility

Operating Band: Ka-band

- Tx: 27.5 to 30 GHz

- Rx: 17.3 to 20.2 GHz

Constellations: LEO/MEO/GEO/HEO

Satellite Services: Agnostic; inquire for specific network certifications

Tracking and Agility

Azimuth Coverage: 360° continuous

Elevation Coverage: +7.5° to +90° (network dependent)

Beam Agility: >250°/sec

Tracking Accuracy: <0.2°

Throughput and Performance

(Typical, at mid-band, cruise conditions, not including radome)

Data Rates: Up to 800 Mbps down and 200 Mbps up (network dependent)

G/T: 18.5 dB/K peak (13.5 dB/K at 20° elev.)

Network Efficiency: Up to 4 bits/Hz

Instantaneous Bandwidth: 500 MHz

EIRP (Psat): 55.5 dBW (51 dBW at 20° elev., 80 W Psat SSPB);

assumes 1.5 dB SSPA-to-Tx LRU interconnect losses

Transmit EIRP Spectral Density: (per 47 CFR 25.218)

- Up to 40.5 dBW/MHz ESD at high latitudes (to 75° N/S)

- Up to 41.5 dBW/MHz ESD at low to mid latitudes (to 50° N/S)

Azimuth Beamwidth: 1.8° Tx and 1.7° Rx

Polarization: Switchable circular (co/orthogonal), simultaneous dual-pol mode

Axial Ratio: <1.5 dB typical

Physical Characteristics

Includes Tx/Rx antenna, KANDU, KRFU, radome, adapter plate and fairing

OAE Dimensions (L x W x H*)	88 in x 43 in x 7 in (2.8 m x 1.1 m x 0.2 m)
System Weight	294 lb. (133 kg)
Avg. System Power	274 W (24 W OAE)

Regulatory Compliance

WRC-19 5G Terrestrial Protection

ITU Article 22 Section II

Environmental

Operating Temperature: -55°C to +74°C external

Environmental Compatibility: RTCA/DO-160G

ThinKom

www.thinkom.com

4881 West 145th Street, Hawthorne, CA 90250 USA

1.310.371.5486

© 2023 ThinKom Solutions, Inc. All rights reserved. ThinKom Solutions reserves the right to make changes in its products or specifications at any time and without notice. All trademarks indicated as such herein are trademarks of ThinKom Solutions.

© Reg. U.S. Patent and Trademark Office.

TAKa2517Rev 10/24